



BY BOUNDLESS TECHNOLOGIES

## ADD5 60 Video Display Terminal

**Wyse 50, 50+ and 60  
VDT emulation set**

**Best UNIX compatibility  
and Video performance  
in a 14" monochrome  
Terminal**

**High reliability backed  
by our 3 year warranty**

**Designed and manufac-  
tured in the USA**



No matter what the operating environment, the ADD5 60 will be right at home. The ADD5 60 emulation set includes the Wyse WY-50/50+, WY-60, DEC VT-100, VT-220, VT 320 and the ADD5 Viewpoint and PC-Term. The ADD5 60 is an ideal solution for customers using Wyse display terminals in legacy applications.

The ADD5 60 has advanced data access, data manipulation and display features, including cut and paste. The terminal features selectable refresh rates up to 100Hz for clear, flicker free viewing and an ISO 9241.3 compliant mode to reduce operator eye strain.

The ADD5 60 is offered with a choice of keyboards that includes PC 104 and ANSI keyboards.

Built in the Boundless "JIT" manufacturing facility in western NY allows rapid delivery of any terminal in any configuration. You can select the ADD5 60 of your choice in any phosphor color with any keyboard with the assurance that your order will be delivered quickly.

Boundless backs its ADD5 60 with a money back guarantee and a 3 year warranty.

**Our focus on providing custom desktop solutions to our  
customers has made Boundless the client choice of every  
major server manufacturer for the last 30 years.**

**Boundless Technologies 1-800-231-5445**



BY BOUNDLESS TECHNOLOGIES

## ADD5 60 Video Display Terminal

### Display Features:

- ◇ 14" Flat face, reduced glare, high resolution screen
- ◇ Bezel to Bezel overscan
- ◇ 60, 71, 82 and 100 hz selectable refresh rates for clear flicker free viewing
- ◇ Choice of Green, Amber or White phosphor
- ◇ 26,30,or 52 lines with top and/or bottom status lines
- ◇ 80 or 132 columns
- ◇ 10 pages of memory
- ◇ Variable-speed smooth scroll
- ◇ Double high, double wide characters
- ◇ Selectable screen saver

### Desk Accessories:

- ◇ Calculator
- ◇ Calendar
- ◇ Clock
- ◇ ASCII Chart

### Communications:

- ◇ Full/half duplex
- ◇ Local block
- ◇ Monitor mode
- ◇ Serial host Port
  - RS-232C main host
  - DTE, DB 25 female
  - up to 134.4k baud
- ◇ Serial Auxiliary Port
  - RS-232 bi-directional serial port
  - DCE, DB 25 female
  - Up to 38.4k baud
- ◇ Parallel Printer Port
  - IBM PC and Centronic compatible
- ◇ Optional Ethernet
  - 10BaseT TCP/IP

### Terminal Emulations:


- ◇ ADD5 Viewpoint
- ◇ VT 100
- ◇ VT 220
- ◇ VT 320
- ◇ Wyse 50
- ◇ Wyse 50+
- ◇ Wyse 60
- ◇ TVI 925
- ◇ SCO Console
- ◇ BBS ANSI
- ◇ AT 386

### Regulatory Agencies:

- ◇ UL, cUL
- ◇ TUV
- ◇ FCC-B,
- ◇ CE
- ◇ MPR-II
- ◇ DHHS
- ◇ VCCI

### Power:

- ◇ 90-264 VAC, 47-63 Hz
- ◇ .50-.20a (max) operating

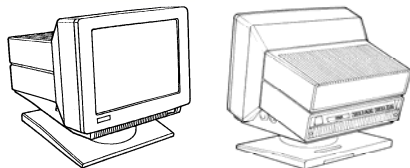

Boundless, ADD5 and the Boundless logo are all trademarks of the Boundless Technologies Inc. All other trademarks and registered trademarks are the property of their respective owners. These specifications are subject to change at any time.

Boundless Technologies  
 1916 Route 96  
 Phelps, NY 14532  
 Phone (toll-free): 1-800-231-5445  
 Phone: 1-315-548-6189  
 Fax: 1-315-548-5100  
[www.boundless.com](http://www.boundless.com)